


**STANDARD FITTINGS**

**BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (1)**

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING  
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)  
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE  
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)

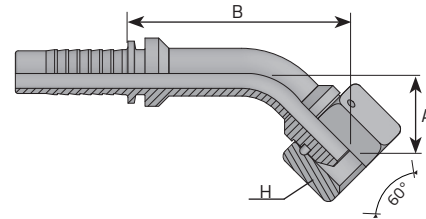


\* : without o-ring / senza o-ring

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
* F45G0302SP	-3	3/16"	4.8	1/8"	28	14	17	40	350	5076
* F45G0304SP	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
* F45G0402SP	-4	1/4"	6.4	1/8"	28	14	17	40	350	5076
* F45G0404SP	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
* F45G0406SP	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
* F45G0408SP	-4	1/4"	6.4	1/2"	14	27	24	55	450	6526
* F45G0504SP	-5	5/16"	7.9	1/4"	19	19	20	51	350	5076
* F45G0506SP	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
* F45G0508SP	-5	5/16"	7.9	1/2"	14	27	24	55	350	5076
* F45G0604SP	-6	3/8"	9.5	1/4"	19	19	19	54	450	6526
* F45G0606SP	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
* F45G0608SP	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
* F45G0806SP	-8	1/2"	12.8	3/8"	19	22	20	63	415	6019
* F45G0808SP	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019
F45G0812SP	-8	1/2"	12.8	3/4"	14	32	21	66	415	6019
* F45G1008SP	-10	5/8"	16	1/2"	14	27	25	63	350	5076

**STANDARD FITTINGS**
**BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (2)**

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING  
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)  
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE  
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)

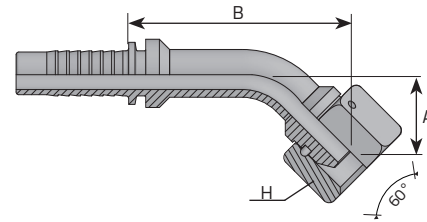

\* : without o-ring / senza o-ring

Code	Tube		Thread		Dimensions			Pressure		
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
F45G1012SP	-10	5/8"	16	3/4"	14	32	26	64	350	5076
* F45G1208SP	-12	3/4"	19	1/2"	14	27	28	62	350	5076
F45G1212SP	-12	3/4"	19	3/4"	14	32	29	63	350	5076
F45G1216SP	-12	3/4"	19	1"	11	38	31	65	350	5076
F45G1612SP	-16	1"	25.4	3/4"	14	32	39	88	350	5076
F45G1616SP	-16	1"	25.4	1"	11	38	41	90	280	4061
F45G1620SP	-16	1"	25.4	1.1/4"	11	50	44	93	280	4061
F45G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	44	102	210	3046
F45G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	45	103	210	3046
F45G2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	45	118	185	2683
F45G2432SP	-24	1.1/2"	38.1	2"	11	70	118	101	185	2683
F45G3232SP	-32	2"	50.8	2"	11	70	55	145	165	2393