


**METRIC FEMALE 24° CONE -45° ELBOW
L TYPE**

FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING
FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L

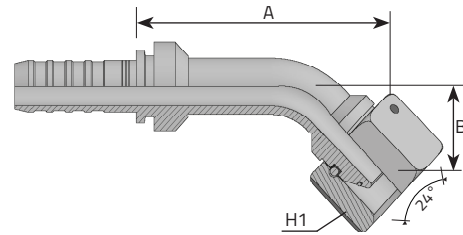

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	D	H1	B	A	
	Inch		mm	mm	mm	mm	mm	mm	
HF45E0616L10	-6	3/8"	9.5	M16x 1.5	10	22	20,8	61,8	
HF45E0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	21,8	68,1	
HF45E0622L15	-6	3/8"	9.5	M22 x 1.5	15	22	24,3	70,6	
HF45E0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	27,7	70,2	
HF45E0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	27,6	75,2	
HF45E0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	30,4	74,6	
HF45E1026L18	-10	5/8"	16	M26 x 1.5	18	32	32,4	73,5	
HF45E1030L22	-10	5/8"	16	M30 x 2	22	32	36,2	76,5	
HF45E1226L18	-12	3/4"	19	M26 x 1.5	18	34	33,4	68,4	
HF45E1230L22	-12	3/4"	19	M30 x 2	22	34	33,9	75,5	
HF45E1236L28	-12	3/4"	19	M36 x 2	28	34	34,8	97,9	
HF45E1636L28	-16	1"	25.4	M36 x 2	28	42	46,7	97,3	
HF45E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	42,9	120,7	