


HYPER SPIRAL



METRIC FEMALE 24° CONE - 45° ELBOW - S TYPE

FEMMINA 45° METRICA O-RING 24° DKOS
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

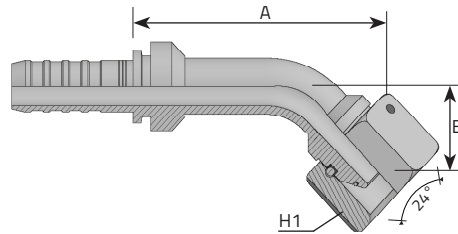

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	D	H1	B	A	
	Inch		mm	mm	mm	mm	mm	mm	
HF45E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	20,8	63,1	
HF45E0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	23,2	69,5	
HF45E0622S14	-6	3/8"	9.5	M22 x 1.5	14	22	23,9	70,2	
HF45E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	26,1	74,1	
HF45E0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	27,5	76,7	
HF45E0830S20	-8	1/2"	12.8	M30 x 2	20	27	27,4	75,1	
HF45E1030S20	-10	5/8"	16	M30 x 2	20	32	31,4	76,7	
HF45E1036S25	-10	5/8"	16	M36 x 2	25	32	32,9	79,7	
HF45E1230S20	-12	3/4"	19	M30 x 2	20	34	33,1	75,7	
HF45E1236S25	-12	3/4"	19	M36 x 2	25	34	35,2	82,8	
HF45E1636S25	-16	1"	25.4	M36 x 2	25	42	42,4	98,5	
HF45E1642S30	-16	1"	25.4	M42 x 2	30	42	48,3	104,9	
HF45E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	42,1	119,9	
HF45E2052S38	-20	1.1/4"	31.8	M52 x 2	38	50	44,1	121,8	