


HYPER SPIRAL

 **Vitulo**

**BSPP FEMALE 45° ELBOW
THRUST-WIRE NUT**

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) +
GESTIFTETE
HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)

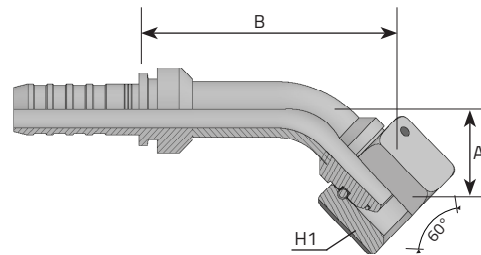

* : without o-ring / senza o-ring

Code	Tube	Thread		Dimensions			Pressure		
		D.N.	Hose	Diam	T	t/1"		H1	A
		Inch		mm	Inch		mm	mm	mm
* HF45G0606SP	-6	3/8"		9.5	3/8"	19	22	22,1	63,1
* HF45G0608SP	-6	3/8"		9.5	1/2"	14	27	24,4	65,4
* HF45G0806SP	-8	1/2"		12.8	3/4"	14	22	20,0	67,5
* HF45G0808SP	-8	1/2"		12.8	1/2"	14	27	23,7	70,2
HF45G0812SP	-8	1/2"		12.8	3/4"	14	27	21,4	70,9
* HF45G1008SP	-10	5/8"		16	1/2"	14	32	26,1	70,6
HF45G1012SP	-10	5/8"		16	3/4"	14	32	26,4	70,9
* HF45G1208SP	-12	3/4"		19	1/2"	14	27	28,7	68,2
HF45G1212SP	-12	3/4"		19	3/4"	14	32	30,4	69,9
HF45G1216SP	-12	3/4"		19	1"	11	-	32,1	71,6
HF45G1612SP	-16	1"		25.4	3/4"	14	42	38,6	93,1
HF45G1616SP	-16	1"		25.4	1"	11	42	43,1	97,6
HF45G1620SP	-16	1"		25.4	1.1/4"	11	42	43,6	98,1
HF45G2020SP	-20	1.1/4"		31.8	1.1/4"	11	50	43,6	117,3
HF45G2024SP	-20	1.1/4"		31.8	1.1/2"	11	55	44,3	117,0