


**HYPER SPIRAL**



**BSPP FEMALE - 60° CONE  
THRUST-WIRE NUT**

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING  
FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)  
DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE  
ÜBERWURFMUTTER  
HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60°  
(TUERCA CON SEGURO)

\* : without o-ring / senza o-ring

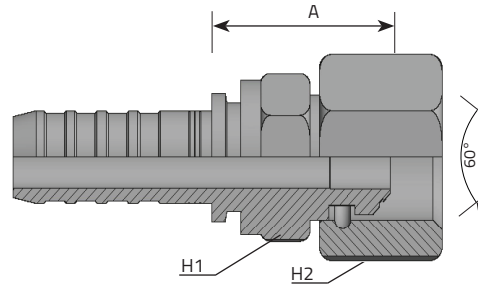

Code	Tube	Thread		Dimensions			Pressure		
		D.N.	Hose	Diam	T	t/1"		H1	H2
		Inch		mm	Inch		mm	mm	
* HFDG0606SP	-6	3/8"	9.5	3/8"	19	22	22	32	
* HFDG0608SP	-6	3/8"	9.5	1/2"	14	22	27	33	
* HFDG0806SP	-8	1/2"	12.8	3/8"	19	27	22	32	
* HFDG0808SP	-8	1/2"	12.8	1/2"	14	27	27	33	
* HFDG0810SP	-8	1/2"	12.8	5/8"	14	-	-	-	
HFDG0812SP	-8	1/2"	12.8	3/4"	14	27	32	37	
* HFDG1008SP	-10	5/8"	16	1/2"	14	32	27	34	
HFDG1010SP	-10	5/8"	16	5/8"	14	-	-	-	
HFDG1012SP	-10	5/8"	16	3/4"	14	32	32	38	
* HFDG1208SP	-12	3/4"	19	1/2"	14	34	27	34	
HFDG1212SP	-12	3/4"	19	3/4"	14	34	32	38	
HFDG1216SP	-12	3/4"	19	1"	11	34	41	38	
HFDG1612SP	-16	1"	25.4	3/4"	14	42	32	40	
HFDG1616SP	-16	1"	25.4	1"	11	42	41	40	
HFDG1620SP	-16	1"	25.4	1.1/4"	11	42	50	41.5	
HFDG2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	50	47.7	
HFDG2024SP	-20	1.1/4"	31.8	1.1/2"	11	50	55	49.7	