


**METRIC FEMALE 24° CONE
S TYPE**

FEMMINA DIRITTA METRICA O-RING 24° DKOS
FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
DKO-S INNENGEWINDE MIT O-RING 24° KONUS
HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

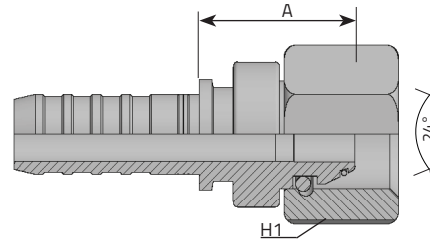

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch		mm	mm	mm	mm	mm	
HFE0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	36.5	
HFE0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	38.5	
HFE0622S14	-6	3/8"	9.5	M22 x 1.5	14	22	39.2	
HFE0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	39.2	
HFE0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	39.7	
HFE0830S20	-8	1/2"	12.8	M30 x 2	20	27	41.5	
HFE1030S20	-10	5/8"	16	M30 x 2	20	32	42.5	
HFE1036S25	-10	5/8"	16	M36 x 2	25	32	44.7	
HFE1230S20	-12	3/4"	9.5	M30 x 2	20	34	42.5	
HFE1236S25	-12	3/4"	19	M36 x 2	25	34	44.7	
HFE1242S30	-12	3/4"	19	M42 x 2	30	42	49	
HFE1636S25	-16	1"	25.4	M36 x 2	25	42	46.7	
HFE1642S30	-16	1"	25.4	M42 x 2	30	42	49	
HFE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	55.2	
HFE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	59.2	