


**INTERLOCK FITTINGS**

**INTERLOCK METRIC FEMALE 24° CONE 45° ELBOW - S TYPE**

FEMMINA 90° METRICA O-RING 24° DKOS  
 FEMELLE 90° MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S  
 DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

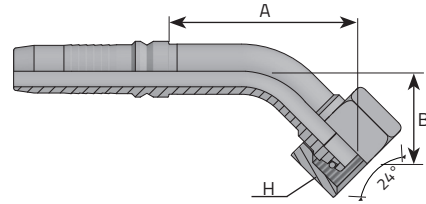

Code	Tube		Thread		Dimensions				Pressure		
	D.N.	Hose	Diam	T	t/1"	D	H	B	A	Bar	Psi
	Inch		mm	mm		mm	mm	mm	mm		
KF45E1030S20	-10	5/8"	16	M30 x 2	20	-	-	-		420	6091
KF45E1230S20	-12	3/4"	19	M30 x 2	20	36	27	61.5		420	6091
KF45E1236S25	-12	3/4"	19	M36 x 2	25	46	28	67.5		420	6091
KF45E1636S25	-16	1"	25.4	M36 x 2	25	46	38	86		414	6004
KF45E1642S30	-16	1"	25.4	M42 x 2	30	50	38	86.5		280	4061
KF45E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	35	103		250	3626
KF45E2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	35	103		250	3626
KF45E2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	45	117.5		250	3626