


**INTERLOCK FITTINGS**

**INTERLOCK BSPP FEMALE 45° (O-RING) - THURST-WIRE NUT**

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING  
 FEMELLE 45° AVEC O-RING CÔNE 60° (ÉCROU À JONC)  
 DKR 45° BOGEN MIT O-RING + GESTIFTETE ÜBERWURFMUTTER (BSPP-GEWINDE)  
 HEMBRA BSPP A 45° CON O-RING CONO 60° (TUERCA CON SEGURO)

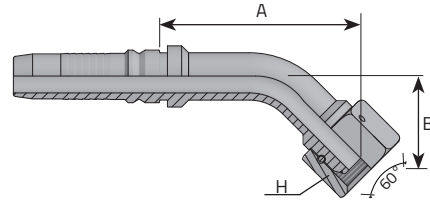

Code	Tube		Thread			Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
KF45G1212	-12	3/4"	19	3/4"	14	32	29	60.7	420	6091
KF45G1616	-16	1"	25.4	1"	11	38	41	87.5	420	6091
KF45G1620	-16	1"	25.4	1.1/4"	11	50	44	90.5	420	6091
KF45G2020	-20	1.1/4"	31.8	1.1/4"	11	50	44	100.5	420	6091
KF45G2424	-24	1.1/2"	38.1	1.1/2"	11	55	45	116.5	345	5004
KF45G3232	-32	2"	50.8	2"	11	70	68	156	345	5004