


**INTERLOCK FITTINGS**

**INTERLOCK METRIC FEMALE 24° CONE 90° - S TYPE**

FEMMINA 90° METRICA O-RING 24° DKOS  
 FEMELLE 90° MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S  
 DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

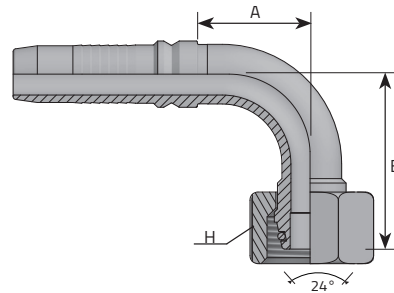

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	D	H	B	A	Bar	Psi
		Inch	mm	mm		mm	mm	mm	mm		
KF90E1030S20	-10	5/8"	16	M30 x 2	20	-	-	-	-	420	6091
KF90E1230S20	-12	3/4"	19	M30 x 2	20	36	59	54	420	6091	
KF90E1236S25	-12	3/4"	19	M36 x 2	25	46	59	54	420	6091	
KF90E1636S25	-16	1"	25.4	M36 x 2	25	46	75	70.5	414	6004	
KF90E1642S30	-16	1"	25.4	M42 x 2	30	50	75	70.5	280	4061	
KF90E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	86	90.5	250	3626	
KF90E2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	86	90.5	250	3626	
KF90E2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	94	97.5	250	3626	