


INTERLOCK FITTINGS



INTERLOCK BSPP FEMALE (O-RING) - THURST-WIRE NUT

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROIT AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKR MIT O-RING + GESTIFTETE ÜBERWURFMUTTER (BSPP-GEWINDE)
 HEMBRA RECTA BSPP CON O-RING CONO 60° (TUERCA CON SEGURO)

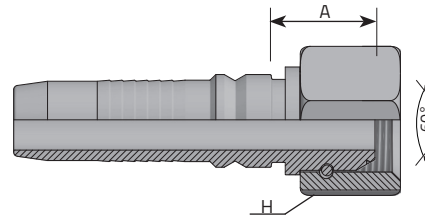

Code	Tube		Thread			Dimensions		Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
KFDG1212	-12	3/4"	19	3/4"	14	32	22.7	420	6091
KFDG1616	-16	1"	25.4	1"	11	38	24.7	420	6091
KFDG1620	-16	1"	25.4	1.1/4"	11	50	27.5	414	6004
KFDG2020	-20	1.1/4"	31.8	1.1/4"	11	50	28.2	345	5004
KFDG2424	-24	1.1/2"	38.1	1.1/2"	11	55	30.5	345	5004
KFDG3232	-32	2"	50.8	2"	11	70	34	345	5004