


**STANDARD FITTINGS**

**KOMATSU STYLE METRIC FEMALE**

FEMMINA METRICA "KOMATSU" SV 60°  
 FEMELLE MÉTRIQUE DROIT "KOMATSU" CÔNE 60°  
 DK "KOMATSU" 60° KONUS METRISCH  
 HEMBRA GIRATORIA RECTA MÉTRICA "KOMATSU" CONO 60°

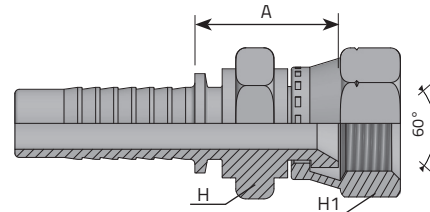

Code	Tube		Thread		Dimensions			Pressure		
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	mm		mm	mm	mm		
FDK0414	-4	1/4"	6.4	M14 x 1.5		17	19	24.2	350	5076
<b>FDK0416</b>	<b>-4</b>	<b>1/4"</b>	<b>6.4</b>	<b>M 16 x 1.5</b>		<b>19</b>	<b>22</b>	<b>24.2</b>	<b>280</b>	<b>4061</b>
FDK0516	-5	5/16"	7.9	M16 x 1.5		19	22	24.2	280	4061
FDK0614	-6	3/8"	9.5	M14 x 1.5		17	19	24.2	280	4061
FDK0616	-6	3/8"	9.5	M16 x 1.5		19	22	24.2	280	4061
<b>FDK0618</b>	<b>-6</b>	<b>3/8"</b>	<b>9.5</b>	<b>M18 x 1.5</b>		<b>24</b>	<b>24</b>	<b>25.8</b>	<b>280</b>	<b>4061</b>
FDK0818	-8	1/2"	12.8	M18 x 1.5		24	24	26.3	280	4061
FDK0820	-8	1/2"	12.8	M20 x 1.5		27	27	29	200	2901
FDK0822	-8	1/2"	12.8	M22 x 1.5		27	27	29	200	2901
FDK0824	-8	1/2"	12.8	M24 x 1.5		32	32	32	200	2901
FDK1022	-10	5/8"	16	M22 x 1.5		27	27	29	200	2901
FDK1024	-10	5/8"	16	M24 x 1.5		32	32	32.5	200	2901
FDK1230	-12	3/4"	19	M30 x 1.5		36	36	32.5	160	2320
<b>FDK1633</b>	<b>-16</b>	<b>1"</b>	<b>25.4</b>	<b>M33 x 1.5</b>		<b>41</b>	<b>41</b>	<b>34.6</b>	<b>160</b>	<b>2320</b>
FDK2036	-20	1.1/4"	31.8	M36 x 1.5		46	46	37.5	125	1813
FDK2442	-24	1.1/2"	38.1	M42 x 1.5		50	50	36.1	100	1450