


## METRIC FEMALE 24° CONE - L TYPE

FEMMINA 90° METRICA DKOL CON O-RING 24°  
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L  
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

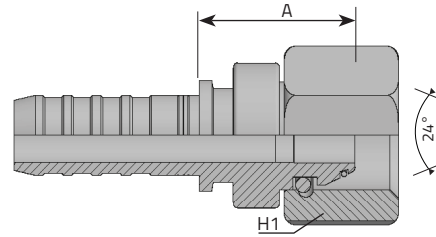

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch		mm	mm	mm	mm	mm	
HFE0616L10	-6	3/8"	9.5	M16 x 1.5	10	22	36.2	
HFE0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	36.5	
HFE0622L15	-6	3/8"	9.5	M18 x 1.5	15	27	39.9	
HFE0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	36.5	
HFE0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	39.9	
HFE0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	38.7	
HFE1026L18	-10	5/8"	16	M26 x 1.5	18	32	39.7	
HFE1030L22	-10	5/8"	16	M30 x 2	22	32	42.6	
HFE1226L18	-12	3/4"	19	M26 x 1.5	18	34	39.7	
HFE1230L22	-12	3/4"	19	M30 x 2	22	34	42.6	
HFE1236L28	-12	3/4"	19	M36 x 2	28	34	46	
HFE1636L28	-16	1"	25.4	M36 x 2	28	42	46	
HFE2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	54.3	