


INTERLOCK FITTINGS

INTERLOCK FLANGE CODE 61 - 3000 PSI

FLANGIA DIRITTA SAE J518 3000 PSI INTERA
 BRIDE DROIT 3000 PSI (PIÈCE ENTIER)
 FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA RECTA 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

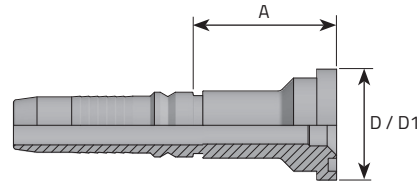

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
		Inch	mm		Inch	mm	mm		
KFDL1212I	-12	3/4"	19		3/4"	38.1	56.7	420	6091
KFDL1216I	-12	3/4"	19		1"	44.5	48.7	420	6091
KFDL1612I	-16	1"	25.4		3/4"	38.1	47.6	415	6019
KFDL1616I	-16	1"	25.4		1"	44.5	47.6	415	6019
KFDL1620I	-16	1"	25.4		1.1/4"	50.8	64.6	415	6019
KFDL2020I	-20	1.1/4"	31.8		1.1/4"	50.8	68.7	250	3626
KFDL2024I	-20	1.1/4"	31.8		1.1/2"	60.3	78.7	250	3626
KFDL2424I	-24	1.1/2"	38.1		1.1/2"	60.3	68.5	200	2901
KFDL2432I	-24	1.1/2"	38.1		2"	71.4	70.5	200	2901
KFDL3232I	-32	2"	50.8		2"	71.4	70.5	200	2901