


INTERLOCK FITTINGS

INTERLOCK FLANGE CODE 62 - 6000 PSI

FLANGIA DIRITTA SAE J518 6000 PSI INTERA
 BRIDE DROIT 6000 PSI (PIÈCE ENTIER)
 FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA RECTA 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

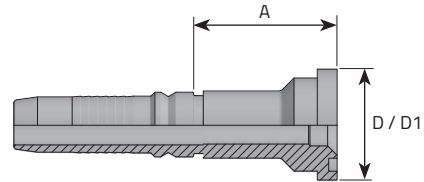

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
		Inch	mm		Inch	mm	mm		
KFDP1212I	-12	3/4"	19		3/4"	41.3	50	420	6091
KFDP1216I	-12	3/4"	19		1"	47.6	61.7	420	6091
KFDP1612I	-16	1"	25.4		3/4"	41.3	61.6	420	6091
KFDP1616I	-16	1"	25.4		1"	47.6	63.6	420	6091
KFDP1620I	-16	1"	25.4		1.1/4"	54	68.6	420	6091
KFDP2020I	-20	1.1/4"	31.8		1.1/4"	54	68.7	420	6091
KFDP2024I	-20	1.1/4"	31.8		1.1/2"	63.5	76.7	420	6091
KFDP2424I	-24	1.1/2"	38.1		1.1/2"	63.5	76.5	420	6091
KFDP2432I	-24	1.1/2"	38.1		2"	79.4	70.5	420	6091
KFDP3232I	-32	2"	50.8		2"	79.4	73	420	6091